

EXPERIMENTAL STUDY OF THERMOELECTRIC CONVERSION EFFICIENCY AND COLD SIDE THERMAL MANAGEMENT

Vamsi Vegamoor^{1,2}, Muhammad Sajid^{2,3,*}, Yasser M. Al Hamidi² and Ibrahim Hassan²

¹Texas A&M University, College Station, TX, U.S.A.

²Texas A&M University at Qatar, Doha, Qatar.

³National University of Sciences & Technology (NUST), Islamabad, Pakistan.

*Corresponding author: Fax: +92 51 9085 6002 Email: m.sajid@smme.edu.pk

ABSTRACT

Thermoelectric generator (TEG) while offering the advantage of operational reliability are constrained by limited efficiencies. This paper, which is from an undergraduate research project, focusses on the contribution of cold side thermal management of commercially available thermoelectric generators towards the thermal to electrical conversion efficiency for a range of hot side temperatures. Electric heating elements are used to vary the heat flux to the TEG while conventional active and passive methods employing air and water as a medium are used for dissipating heat from the cold side of TEGs. Both thermal and electrical performance parameters of the TEGs are recorded for various ambient conditions in an indoor facility corresponding to naturally occurring wind conditions. At the end, the utility and effectiveness of the cooling methods are quantified for the range of operating temperatures.

NOMENCLATURE

α	Seebeck Coefficient (V/K)
ΔT	Temperature difference (°C)
η	Efficiency (%)
I	Current through TEG (A)
P_{in}	Input power (W)
P_{out}	Output power of TEG (W)
R_{int}	Internal electrical resistance (Ω)
T_c	Temperature of cold side of TEG (°C)
T_h	Temperature of hot side of TEG (°C)
V	Voltage generated by TEG (V)

INTRODUCTION

With the current state of energy and its availability, there have been several attempts at developing environmentally conscious means to generate electricity from simple sources such as temperature differences. Thermoelectric generators (TEG) use an array of semiconductors to generate voltage when presented with a temperature difference. Essentially relying on the material dependent Seebeck effect [1] as seen below in (1) and physically can be quantified as the generation of an electromotive field in a temperature difference.

$$E_{emf} = -\alpha \Delta T \quad (1)$$

However, from the current literature available on TEGs, the efficiency of these devices falls below 5-8% [2] leading to a major concern in their inability to provide designed performance. Therefore, TEGs are seen as devices that would make use of residual heat from its surroundings to generate small voltages while providing a reasonable cost to benefit ratio. TEGs can be used to convert the waste heat given off by electrical instruments, vehicles and numerous other systems, to generate power [3, 4] as well as for heat dissipation and sensing thermal energy [5]. Research on the various uses suggests that TEGs could be used as coolers, high and low power generation, and superconductors.

Another use that is being investigated is the possibility of using TEGs in Wireless Sensor Network (WSN) applications due to the longer lifespan and smaller physical dimensions compared to primary batteries, cost efficiency and the use of ambient waste heat sources which results in a generally better environment [6]. Commercially, TEGs are being considered for their energy

generation capacities leading to implementation in exhaust fumes [7] and for the development of electrically independent combustion gas stoves that can use TEGs to power auxiliary electrical components without being connected to a power grid, giving the possibility for use in remote locations [8]. TEGs have also impacted space exploration where they are powered by radioactive emissions to support onboard electronics during long trajectories coupled with restrictions in fuel carrying capacity [9, 10].

Several works have investigated the mechanisms by which various factors affect the output, and as a result - the efficiency of the TEGs. These studies have focused on a diverse range of varying parameters, resulting in different setups and analysis methodology. This necessitated a study of cold side thermal management of thermoelectric generators keeping, varying only the heat dissipation strategy while all other parameters remain same. Thereby allowing a better assessment of cooling methodologies and guidelines for thermal management.

A significant assumption of the current experiment is based on the work by Apertet et al [11] which highlights the importance of assuming thermal environment conditions and the resulting effect on the maximum output power by distinguishing two models. It was concluded that in order to simultaneously maximize efficiency and power output, the Norton model provided the more feasible solution, which has been utilized in the current experiment. In order to analyze the external and internal factors affecting performance Sabino et. al [12] using aluminum fins, concluded that the temperature gradient and voltage increased in similar fashions. Additionally, W.-H. Chen et al.[13] study on geometric effect on cooling power and performance and the study by Meng et al [14] concluded that the heat sink temperature affected the cooling power more than the heat load. Also recognizing the effect of heat loss through geometry as mentioned in Niu et al[15], W.-H. Chen et al. experimented on the various geometric conditions affecting the TEG to generate numerical models of the hot and cold side while assuming steady-state conditions, constant thermal contact resistance and temperature dependent TEG material properties. A similar experiment by Gomez et. al [16] comes to the same conclusion after analyzing the influence of current variance and thermal resistances on various geometric and working conditions.

It still remains challenging to achieve design efficiency levels and identify operating conditions and parameters for their optimum usage. While previous works test the various physical, thermal and electrical factors affecting the TEG's performance, many concentrate on the cooling design itself and some groups tend to focus on different cases of a single concept. Therefore this project aims to provide a comprehensive comparison of various cooling methods on a single TEG to examine if design specifications of efficiency are realistic.

EXPERIMENTAL METHODS

The experimental setup consists of a 40 x 40 mm thermoelectric module obtained from Tecteg, Canada, with a stated peak efficiency of ~6% at a cold side temperature of 30°C and a ΔT of 100-150°C. The thermal receiver end of the module was attached to a hot plate for a range of heat fluxes, while various heat sinks were attached to the cold side of the module for heat dissipation. A complete list of all equipment used to perform the experiments is listed below.

Table 1: List of equipment

Equipment	Description
Heater	Ceramic Hotplate & Omega Silicon Heater (45 W Maximum heat power output)
Thermocouples	Omega, Type T, 0.25mm & Omega Type K, 0.125mm
Thermal Paste	Silicon Paste
Thermal Pads	High conductivity ($K=6$ W/m.K) pads from Arctic Cooling, thickness 0.5 mm
NI Data Acquisition Cards	NI9211 (thermocouple input), NI9201 (analog voltage input), NIDAQ9172
Ammeter	Agilent Technologies handheld multi-meter
Power Supply	Agilent Technologies (maximum output of 50V) & Leybold (maximum output of 250V) variable DC power supplies

The thermal grease and the hot plate heater were supplemented with thermal pad and Omega silicon heater due to their effective performance. Similarly, fine wired thermocouples of 0.125mm diameter were used to reduce heat loss between the contact surfaces. The following heat sinks were used for heat dissipation.

Table 2: List of cooling devices used in study

Equipment	Description
Fin	Aluminum fins (manufactured to the outer dimensions of TEG)
Hybrid Passive Cooling	Fanless CPU Cooler from NoFan™ Corporation (model: CR-95C)
Water Tank	Aluminum tank (manufactured to the outer dimensions of TEG)
Wind Tunnel	Texas A&M University at Qatar Facilities
Heat Exchanger	CPU Water cooling block, 41mm x 41mm x 12mm. From VvW Technologies.

Experimental setup:

The TEG was tested under the following conditions:

- No added cooling (natural convection)
- Passive Air Cooling: Fin
- Passive Water Cooling: Water Tank
- Hybrid Cooling: NoFan™ CPU Cooler
- Active Air Cooling: Wind Tunnel
- Active Water Cooling: Heat Exchanger

Each of the above experiments will be discussed separately, however for all, there is a general set up which was consistently used as shown in Fig. 1.a below. The difference in the setups was in the type of cooling attachment placed above the TEG.

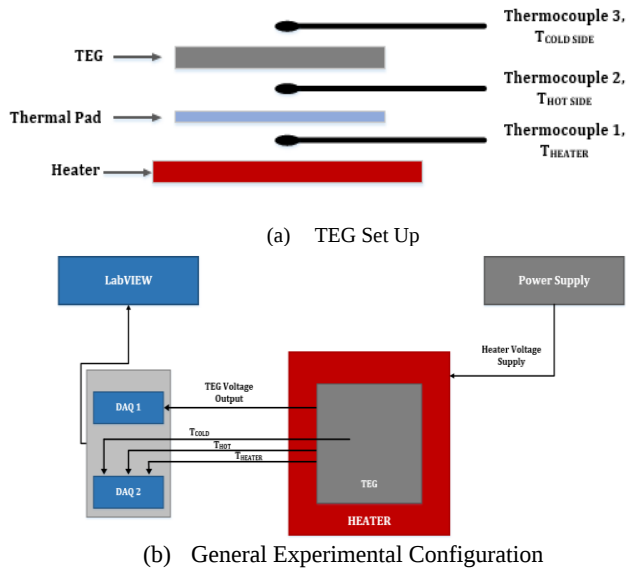


Figure 1: Schematic representation of experimental facility

An overview of the five experimental setups under passive and active cooling that were pursued in the current work is depicted in Fig. 1.b. The

methodology followed for each experimental run is described in the following sections.

No Added Cooling: In this case natural convection was the sole mechanism for heat removal from the thermoelectric module. Thermal grease was used to ensure good thermal contact between the heater surface and the hot side of the thermoelectric device.

The heater was set to temperatures between 30°C and 70°C because and temperature and voltage data was collected at a sampling rate of 3Hz. The internal resistance was calculated manually by using an external resistor, of known resistance, placed in series with the TEM and an ammeter to measure the current. The power output was calculated using this resistance in order to quantify the efficiency of the device.

Passive Air Cooling: A fin was used to provide heat dissipation from the TEG placed on the heater, with fine thermocouples for acquisition of thermal data. The voltage supplied to the heater was controlled, which allowed for measurement of power input. This was later used to measure the efficiency of the TEG under the specified cooling method. All temperature and voltage measurements were collected using LabVIEW at a continuous sampling rate of 1 Hz.

The hot side of the TEG was maintained at a constant temperature after achieving steady state while the cold side varied. The test was repeated for various hot side temperatures—and corresponding voltage inputs of 30V, 40V and 50V—whilst collecting temperature data on the hot and cold side as well as the voltage output. The heater thermocouple was used to ensure that data collection did not begin prior to steady state. The internal resistance of the TEG at 4.5Ω, as already specified by the manufacturer, was used to calculate the power output.

Passive Water Cooling: The process described above was repeated with a water tank as the cooling method. The tank was fabricated from 1mm aluminum sheets. Water was kept at room temperature and the heat temperature was varied.

For this method, a broader range of input voltages for the heater for used, from 30V to 70V in increments of 10V, in order to reach higher hot side temperatures comparable to the heat dissipation potential associated with water based cooling methods. While the lower bound was kept in same range is previous experiments for continuity.

Hybrid Cooling: In this case a commercial CPU cooler manufactured by NoFan™ was employed for

heat dissipation from the cold side of the TEG. The NoFan™ cooler is considered as a hybrid device since there is a liquid coolant in the cylindrical fins which goes through a phase change as it absorbs heat from the cold side of the TEG, while heat rejection takes place from the fins aided by natural convection. The fan less cooler uses patented ‘IcePipe’ technology and yields a maximum TDP (thermal design power) of 95 watts.

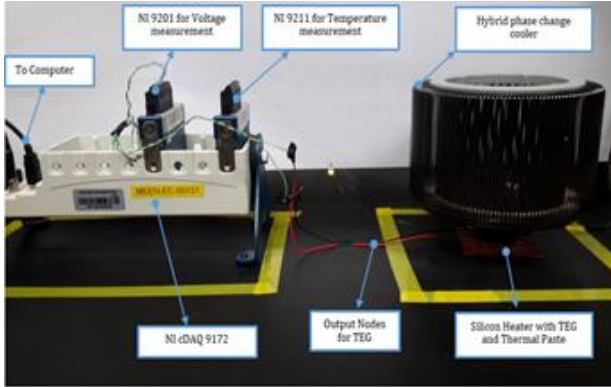


Figure 2: Experimental Setup for Hybrid Cooling Method

It's functioning is based on natural circulation of the liquid coolant through capillary action. Since no additional cooling is needed, it is a passive cooler with a phase change process. This cooler was chosen due to the relatively newer technology using phase change cooling which results in a noiseless, dust free and low maintenance way to cool PC systems and offers a hitherto unexplored TEGs cooling techniques. The complete experimental setup is shown in Fig. 2. The Data Acquisition system is towards the left and was maintained same for all cooling methods.

Active Air Cooling: The TEG was placed in a wind tunnel and fitted with the fin used in the passive air cooling experiment. The heater was insulated using cardboard to prevent heat loss. The experiment was performed for two wind speeds and 5 input voltages mentioned earlier.

Active Water Cooling: The final cooling method was performed using a heat sink which uses circulating water as the active cooling agent. The flowrate of the water was kept constant and five measurements were collected.

RESULTS

Data from the three thermocouples and the open circuit voltage was measured. The heat flux input was changed by varying the input DC voltages to the heater. For the case of passive air cooling and no-

cooling, the range of voltages supplied were 30VDC, 40VDC and 50VDC.

Since the Silicon heater that was used was rated for a maximum voltage input of 115VDC, the manufacturer provided the following equation to calculate the heat power given out by the heater at any voltage below the maximum:

$$P_{Actual} = P_{Rated} * \left(\frac{V_{Actual}}{V_{Max}}\right)^2 \quad (2)$$

Consequently, Table 3 shows the net heat flux provided by the heater at the various voltage settings that were used throughout this experiment.

Table 3: Relation of Heater Supply Voltage and Heat Flux

Supply Voltage(V)	30	40	50	60	70
Input Heat Power(W)	3.1	5.4	8.5	12.2	16.7
Heat Flux (W/m ²)	478.5	850.7	1329.2	1914.0	2605.2

Instead of maintaining a constant hot side temperature, the input heat flux was kept constant, which is a more practical scenario since most waste heat sources have a stable heat energy loss rather than a persistent temperature. While studying the General Temperature and Voltage Characteristics it was observed, that the voltage data was excessively noisy, and prohibited any analytical study. Hence, a Low-Pass Butterworth filter was applied via MATLAB with a normalized cutoff frequency of 0.01. Additionally, ΔT was initially plotted as a function of time. It was noted that both voltage and ΔT have similar behavior with time. Therefore there is a general correlation between output voltage produced and temperature difference applied across the TEG as confirmed by the conclusions drawn by Sabino et. al[12]. The voltage output was then plotted against ΔT at specific points to find the Seebeck coefficient of the device which was the slope of the linear fit and was valued at 0.022 V/K which is comparable to that found in literature[17], 0.0119 V/K, for the corresponding model of the Peltier device.

The voltage readings collected over a range of cold side temperatures are shown in Figure 3. As expected, an increase in the cold side temperature (resulting in a decrease in the temperature gradient over the TEG) resulted in the decrease in the output voltage. The uncertainty associated with the quantities on the vertical and horizontal axis are also displayed in each of the following graphs.

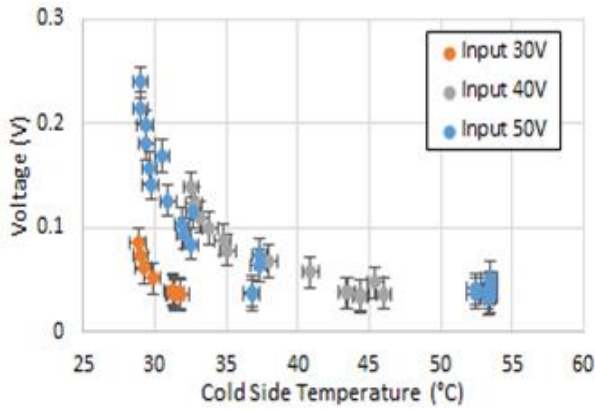


Figure 3: Voltage Output vs. Cold Side Temp. for No Cooling

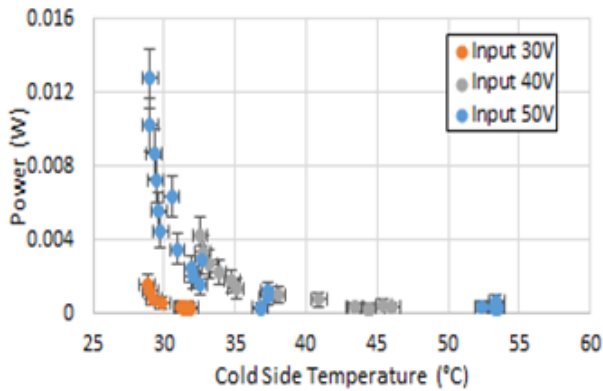


Figure 4: Power Output vs. Cold Side Temp. for No Cooling

From the open circuit voltage, and the known internal resistance of the thermoelectric generator, the net maximum power output from the generator was calculated, as shown in Fig. 4. The internal resistance of TEGs are known to vary with temperature. Resistance curve were obtained from the manufacturer for different hot side and cold side temperatures.

Following this, the heat power delivered by the Silicon heater from Table 3 was considered as the input power and the efficiency of the TEG as a system was calculated. The efficiency of the system when a fin was used to cool the TEG with free convection is shown in Figure 5. It can be noted that the values for the efficiency here are significantly higher than those in Figure 6, when no cooling method was implemented.

Next, the Hybrid NoFan™ CPU cooler was used to draw heat away from the cold side of the TEG. The data collected was somewhat unexpected

and did not display a clear trend. One possible reason is that the heater was not able to supply sufficient heat energy to the TEG, compared to the energy being dissipated by the cooling system. The efficiency of the system at various input levels are displayed in Figure 6.

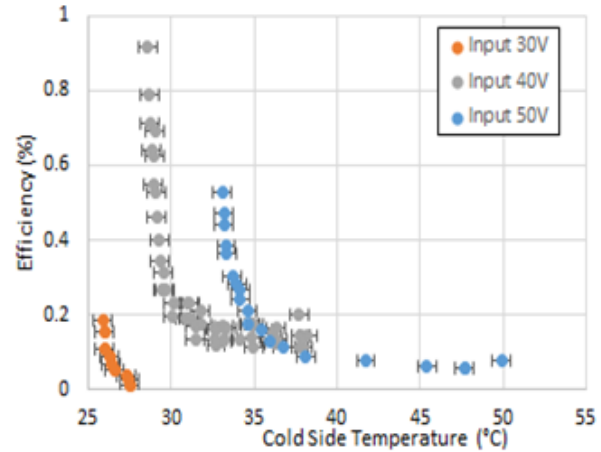


Figure 5: Efficiency vs. Cold Side Temp. for Fin Cooling

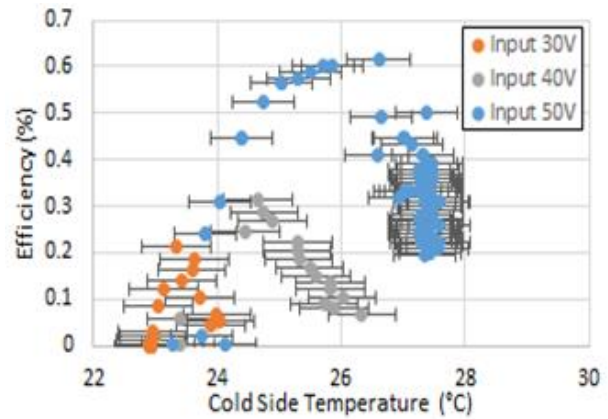


Figure 6: Output Efficiency vs. Cold Side Temperature for Hybrid Cooling

This complete process was repeated for four other cooling methods: Passive water cooling, Active Water cooling, and forced convection using a wind tunnel at two different air velocities (Low Speed: 2.9 m/s and High Speed: 6.4 m/s). This resulted in a total of 16 runs. During these runs variations in efficiencies were observed after passage of settling time. The observed peak efficiencies that were obtained for each cooling method are listed in Table 4. Highest efficiencies were obtained by active air cooling. The red vertical bars show the uncertainty associated with each measurement.

Table 4: Peak efficiencies for different cooling methods

		Passive	Active	Active	Active
		Water	Water	Air	Air
				Low	High
				Speed	Speed
Heater	40	0.05	0.34	2.73	1.98
Input	50	0.13	0.49	3.17	4.22
Level	60	0.40	0.59	4.68	2.66
(Volts)	70	0.77	0.82	4.51	4.41

While the peak efficiency only lasts for a short duration in each run, a more important value is the steady state efficiency of the system. Any large scale implementation of waste heat recovery will need to be run continuously and hence studying the steady state efficiency is of paramount importance. The steady state values for each of the sixteen trials are summarized in Table 5 below.

Table 5: Steady state efficiencies for different cooling methods

		Passive	Active	Active	Active
		Water	Water	Air	Air
				Low	High
				Speed	Speed
Heater	40	0.09	0.04	0.26	0.30
Input	50	0.05	0.12	0.39	0.39
Level	60	0.11	0.27	0.54	0.52
(Volts)	70	0.14	0.32	0.74	0.66

A key objective of this work was to study different cold side management techniques from the perspective of overall efficiency. In order to compare the different sample and statistically analyze the data, an Analysis of Variance (ANOVA) test was carried out.

Table 6: ANOVA for all cases with 75% confidence

Source					P-	F
of					value	crit
Variation	SS	df	MS	F		
Rows	0.60	1	0.60	1.68	0.24	1.62
Columns	20.81	6	3.47	9.70	0.01	
Error	2.14	6	0.36			
						1.78
Total	23.56	13				

A two-way ANOVA without replication was used to determine whether the cooling method and the input heat flux have an effect on the peak efficiency. The results of the analysis are presented in Table 6, where the heat flux is represented by the rows and the

cooling methods by columns. At a 75% confidence interval, both factors have a significant effect on the data, with the cooling method having a greater effect on the peak efficiency. Another ANOVA was applied to determine whether the wind speed of the active air cooling method has an effect on the peak efficiency, shown in Table 7. Even with a confidence interval as low as 75%, the wind speed does not have a significant effect on the peak efficiency.

Table 7: ANOVA for wind speeds in active air cooling.

Source					P-	F
of					value	crit
Variation	SS	df	MS	F		
Rows	10.45	4	2.61	3.89	0.11	2.06
Columns	0.24	1	0.24	0.35	0.58	1.81
Error	2.69	4	0.67			
Total	13.37	9				

The analysis of variance (ANOVA) statistical model was used on the data to analyze the associated variance between the data groups. For the case of the experiment, the data groups were divided into two main divisions; the cooling method and input heat flux and the two different wind speeds for the active air cooling method. The effect analyzed was these factors' influence on the peak efficiency and while the initial claim of the first two factors i.e. cooling method and input heat playing a significant role on the efficiency, was confirmed, the wind speed having no significant contribution to the efficiency was unexpected. It was assumed that due to higher rates of cooling with increasing wind speed, higher wind speeds would yield higher efficiencies. However, since the efficiency depends on the power input and output and not solely the heat transfer, the marginally larger power required for higher wind speeds, balances the peak efficiency between the trials with varying speeds.

CONCLUSION

Our observations indicate that the only methods to come close to the manufacture specification of efficiency are the active air cooling which reach a maximum of 4.5% efficiency if peak efficiency is considered. From our data, considering steady state efficiencies the cooling methods based on a decreasing efficiency can be listed as follows; active air cooling, active water cooling and passive water cooling. Possible changes to future experiments

include testing different TEG elements to get a better sample space. It is clear that due to the longevity, relative durability, small size, lack of moving parts and the simplicity of energy transfer makes TEGs a fast rising and feasible concept for energy generation. Any efforts to employ TEGs in large scale energy generation however need to consider the individual and collective efficiencies of the thermoelectric elements.

KEYWORDS

Thermoelectric, thermal management, conversion efficiency.

ACKNOWLEDGEMENTS

The authors would like to thank Pavithra Mangapathy, Noor AlAkhawand, Mai Hamed and Mayssaa Jbeili for their contributions to this work.

REFERENCES

1. S. J. Blundell and K. M. Blundell, "Concepts in Thermal Physics," Oxford Press, 2006, pp. 391-396.
2. P.J. Bateman, "Some Notes on the Possible Application of Thermoelectric Devices to the Generation of Electric Power," Ministry of Aviation, Aeronautical Research Council, London, 1960.
3. Y. Apertet, H. Ouerdane, C. Goupil and Ph. Lecoq, "Influence of thermal environment on optimal working conditions of thermoelectric generators," *Journal of Applied Physics*, vol. 116, 2014.
4. U. Sabino, S. Suyitno, I. Ali and E. P. Budiana, "Experimental Study of Thermoelectric Generators," *Applied Mechanics and Materials*, 2014.
5. W.-H. Chen, C.-C. Wang and C.-I. Hung, "Geometric effect on cooling power and performance of an integrated," *Energy Conversion and Management*, vol. 87, pp. 566-575, 2014.
6. M. JH, W. XD and Z. XX, "Transient modeling and dynamics characteristics of thermoelectric cooler," *Applied Energy*, vol. 108, pp. 340-348, 2013.
7. Niu X, Yu J and Wang S, "Experimental study on low-temperature waste heat thermoelectric generator," *J Power Sources*, vol. 188, pp. 621-626, 2009.
8. M. Gomez, R. Reid, B. Ohara and H. Lee, "Influence of electrical current variance and thermal resistances on optimum working," *Journal of Applied Physics*, vol. 113, 2013.
9. F. Guyancourt, "Revised Thermocouple Reference Tables," [Online]. Available: <http://www.omega.com/temperature/z/pdf/z207.pdf>. [Accessed 18 October 2016].
10. M. P. Codecasa, C. Fanciulli, R. Gaddi, F. Gomez-Paz and F. Passaretti, "Design and Development of a TEG Congenerator Device Integrated into a Self-Standing Natural Combustion Gas Stove," *Electronic Materials*, vol. 44, pp. 377-383, 2014.
11. Q. Du, H. Diao, Z. Niu, G. Zhang, G. Shu and K. Jiao, "Effect of cooling design on the characteristics and performance," *Energy Conversion and Management*, vol. 101, pp. 9-18, 2015.
12. W. He, G. Zhang, X. Zhang, J. Ji, G. Li and X. Zhao, "Review Recent development and application of thermoelectric generator," *Applied Energy*, vol. 143, pp. 1-25, 2015.
13. S.B Riffat and X. Ma, "Thermoelectrics: a review of present and potential applications," *Applied Thermal Engineering*, vol. 23, no. 8, pp. 913-935, 2003.
14. D. Madan, Z. Wang, P. K. Wright and J. W. Evans, "Printed flexible thermoelectric generators for use on low levels of waste heat," *Applied Energy*, vol. 156, pp. 587-592, 2015.
15. M. V. Lukowicz, T. Schmiel, M. Rosenfeld, J. Heisig and M. Tajmar, "Characterisation of TEGs Under Extreme Environments and Integration Efforts Onto Satellites," *Electronic Materials*, vol. 44, pp. 362-370, 2014.
16. M. LaMonica, "A Thermoelectric Generator That Runs on Exhaust Fumes," *IEEE Spectrum*, 14 Oct 2014. [Online]. [Accessed 10 2016].
17. A. Date, A. Date, C. Dixon, R. Singh and A. Akbarzadeh, "Theoretical and experimental estimation of limiting input heat flux," *Solar Energy*, no. 111, pp. 201-207, 2015.